



Lugano Flow Permeable Paving


Technical Data Sheet

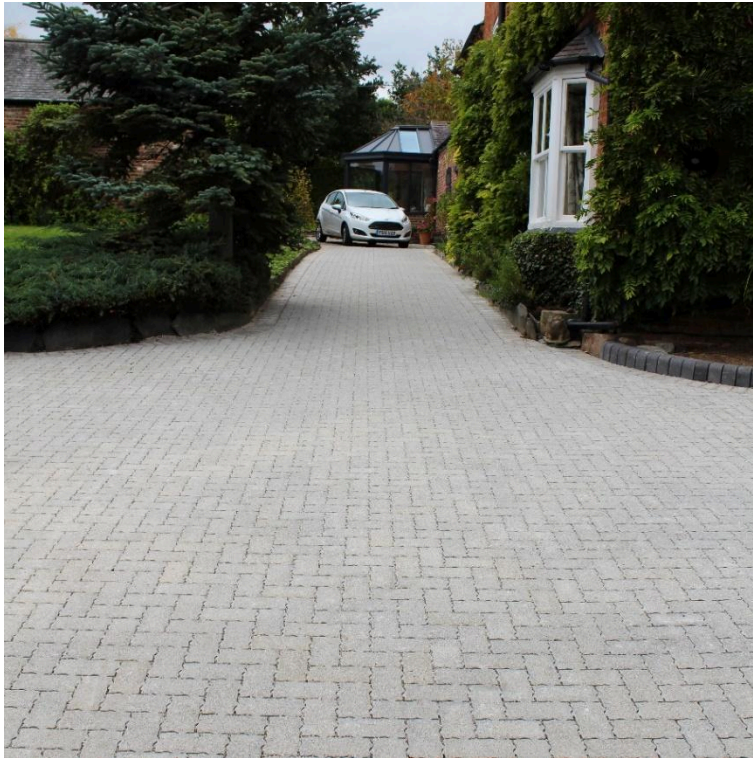

Misty Grey



Graphite Grey



Misty Grey



Rosa

Description

With the distinctive tones and texture of our popular Lugano range combined with our unique nib design which allows surface water to drain between the blocks. Lugano Flow is the perfect choice for everyday flooding and excess surface water by releasing it back into the environment in a controlled way.

Application

Lugano Flow is suitable for most permeable paving applications, and is particularly suited to large urban and commercial installations.

Product Type	Textured precast concrete permeable block paving.
Manufacturing Process	Semi Dry pressed and vibrated concrete.
Manufacturing Standard	BS EN 1338: 2003
Design Standard	BS 7533-101: 2025 & BS 7533-103: 2026
Installation Standard	BS 7533-102: 2025
UKCA/DOP	<i>Contact Brett for more information</i>
NBS Specification	45-20-64/400 Precast concrete paving blocks / Q24 110 112 113, Q25 335

Product Performance

Nominal Dimensions (mm)	Working Dimensions (mm)	No.per pack	m2 per pack	No.per m2	Pack wt max kg
200x100x60	203x103x60	432	8.64	50	1300
200x100x80	203x103x80	336	6.72	50	1266

Tolerances on Working Dimensions	Class 2 tolerances on dimensions, Plan Size \pm 2mm; Thickness \pm 3mm
Tensile Strength	Characteristic tensile splitting strength \geq 3.6 Mpa; Failing load \geq 250 N/mm
Abrasion Resistance	Class 4 - \leq 20mm - Determined by Wide Wheel Abrasion Test
Durability (Freeze Thaw)	Class 3 \leq 1,0kg/m ² with no individual result $>$ 1,5kg/m ²
Slip / Skid Resistance	PTV Unpolished Slip Resistance Value \geq 55 - Potential for slip - Low
Thermal Conductivity	1.2 W/(mK)
External Fire Performance	Deemed to satisfy, see commission decision 2000/553/EC
Reaction to Fire	Class A1, see commission decision 2000/605/EC
Surface Permeability	4265 mm/h when tested to BS DD 229: 1996

Sustainability

BREEAM	Concrete Block Paving 60mm: A rating, as per the BRE Green Guide, 4th Edition 2009, A+ rating can be achieved when used in conjunction with a prepared recycled sub-base. Concrete Block Paving 80mm: B rating, as per the BRE Green Guide, 4th Edition 2009, A rating can be achieved when used in conjunction with a prepared recycled sub-base.
BES 6001	Responsible Sourcing of Concrete Products (Rating: Excellent)
Recyclable	100% of this product can be recycled.
Brett 5-Star Sustainability Rating	=4
Embodied Carbon	

Nominal Dimensions (mm)	kg CO ₂ -eq per m ²		
	50mm	60mm	80mm
200x100	-	14.31	19.08

Early Life and Maintenance

Once your paving has been installed, you may notice some changes to its appearance in the first few days and weeks. These visual changes can be due to a number of reasons originating from the

concrete and/or the manufacturing or installation method. Many of these will simply weather away, including:

<p>Efflorescence</p>	<p>The ongoing chemical reaction within the concrete which provides its strength can produce calcium carbonate (a white powdery residue) which may appear on the surface of products. This temporarily lightens the product but will typically weather away without reoccurrence.</p>
<p>Porosity</p>	<p>Concrete continues to cure for many years after manufacture. Whilst this happens and usually during its initial life, a level of porosity may exist where some product retains water, giving a damp appearance. This will diminish as the concrete continues to harden as the product dries out.</p>
<p>Aged and distressed products</p>	<p>For certain products, we distress the edges to offer an aged appearance and enhance the character of the paving. A dusty residue can be left on the blocks. This will weather away.</p>
<p>Differential Curing</p>	<p>Dark patches occasionally appear on the surface of concrete products. This may be differential curing and is caused by varying moisture levels within the flag drying at different rates. Like efflorescence, given time and the natural weathering process, these patches will become less visible.</p>